

## Mini Thermostatic Valve w/Volume Control or Diverter

4-361C




### TECHNICAL DETAILS

ADA Compliance: Yes  
 Access Hole: 2" x 7"  
 Number of Handles: Two  
 Handle Spread: 5"  
 Top Handle Turn Angle: Quarter Turn  
 Bottom Handle Turn Angle: 115-118°  
 Installation Type: Wall Mounted  
 Primary Material: Brass  
 Valve Material: Ceramic  
 Flow Rate: 6.5 GPM  
 Flow Restriction: 1.8 GPM per function  
 Water Pressure Maximum: 85 PSI  
 Water Pressure Minimum: 20 PSI  
 Water Pressure Recommended: 60 PSI

### PRODUCT FEATURES

- Style: Traditional
- Collection: Carrara
- Temperature Controlled By Thermostatic
- Lever Handles

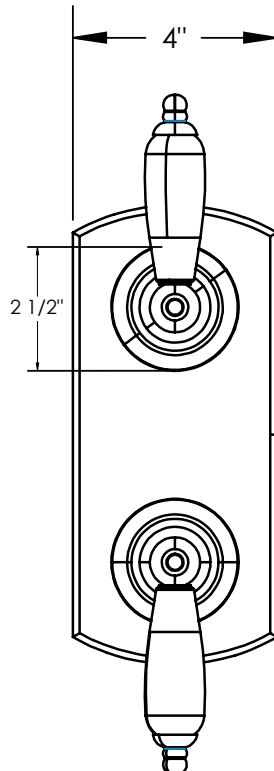

### CODES & STANDARDS



ASME A112.181/ CSA B125.1, ASME 112.18.2/ CSA B125.2, ANSI NSF, CEC, Watersense 61 Sect. 9, State of MA.

### WARRANTY

Mechanical Warranty: 10 Years from date of purchase.  
 Finish Warranty: See catalog for further information.

