

Specifications:

wall-mount electronic faucet

EX04A/EX04A.5/EX04A.35

Installation:	wall-mount 1-hole, touch-free
Exterior Dimensions:	H: 2 1/2" SPOUT: 9 7/8"
Material:	solid brass construction
Water use:	1 GPM (EX04A), 0.5 GPM (EX04A.5), 0.35 GPM (EX04A.35)
Power supply:	AC/DC
Finishes:	CR - polished chrome PN - polished nickel NI - brushed nickel BG - brushed gold 44 - matte black TN - titanium
Cutout Size:	Ø 1"
Accessories included:	25" pvc pipes with elbows power adapter, flexible supply line F 1/2" and battery box



Features:

- Power supply options:
AC - transformer with a plug to electricity and/or
DC - battery pack for 4 x AA alkaline batteries (batteries not included)
- on average lasts for 108,000 use cycles
- For cold or premixed water (mixer sold separately)
- 10 seconds metering cycles
- Sensor life expectancy: 500,000 cycles
- Minimum distance sensor and surface 10"
- Water pressure: 15-90 PSI, recommended 43.5 PSI
- Water temperature: 34-120° Fahrenheit (1-50° Celsius)
- No reflective surfaces (mirrors, polished metal finishes, etc) to be placed in the range of the sensor

Codes + Standards:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61
- NSF/ANSI/CAN372
- Compliant with California AB-100
- 1 GPM Watersense certified (EX04A)
- 0.5 GPM CAL-Green compliant (EX04A.5)
- 0.35 GPM LEED Credit (EX04A.35)

ADA


compliant when installed to specific requirements of this regulation



Recommended Items:

- Replacement parts:
 - #4ABATPK - replacement battery pack
 - #EX04A-SENR replacement sensor
- Mixing valves (sold separately)
 - #EX20A - mechanical mixing valve
 - #EX25A - integrated thermostatic valve
- American size grid drains
 - #7100-18 - without overflow holes
 - #7100-18OF - with overflow holes

- touch-free safety from spreading undesirable pathogens
- commercial grade automated fixture
- low flow promotes water use savings

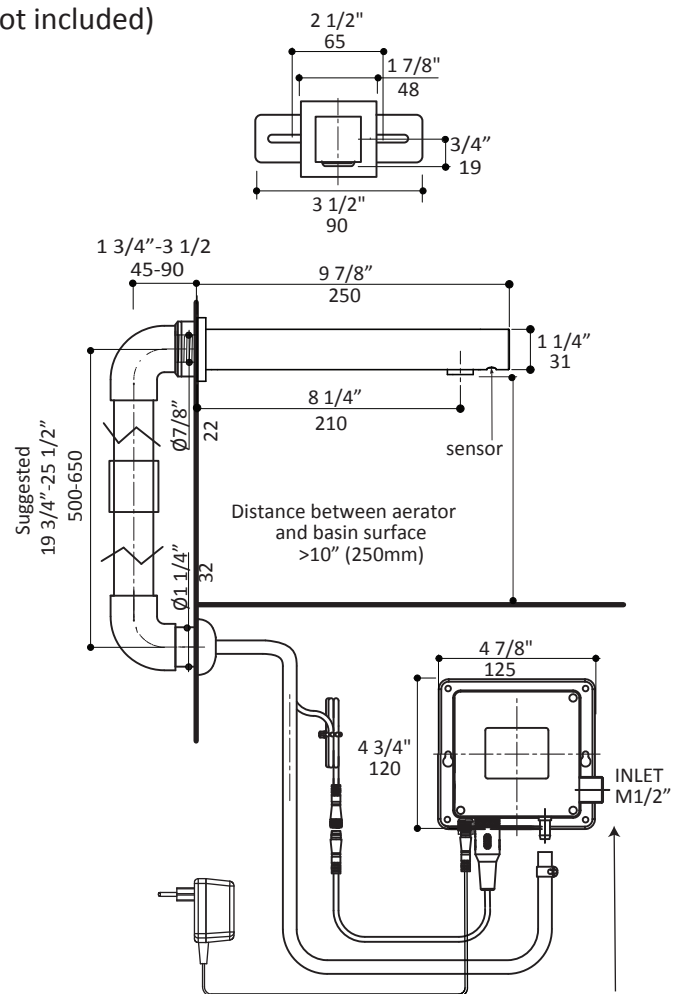

IMPORTANT: Install provided flow reducer on the water inlet