



# RM-49-HC

Glass Door Merchandiser with Swing Door



RM-49-HC  
01/15/22  
Item # 13544

W x D x H  
60" x 29.75" x 78"



ANSI / NSF 7



## Dimensions / Capacity

|                                |                       |
|--------------------------------|-----------------------|
| Interior Storage Capacity (CF) | 42.61 ft <sup>3</sup> |
| Overall Width x Depth          | 60" x 29.75"          |
| Height                         | 78"                   |
| Depth with Door Open           | 58.1"                 |
| Adjustable Shelves             | 5 per section         |
| Shelf Dimensions (W x D)       | 27" x 21.75"          |
| Crated Shipping Weight         | 610 lbs.              |
| Crated Width x Depth x Height  | 63" x 32.25" x 86"    |

## Electrical / Refrigeration

|                                      |                 |
|--------------------------------------|-----------------|
| Voltage                              | 115/60/1        |
| HACR Breaker                         | 15.0 Amps       |
| Electrical Connection (NEMA)         | 5-15P ⓘ         |
| Voltage Range                        | 104-126         |
| Ambient Temp. Range                  | 60° to 86°F     |
| Control Setpoint Range               | 28° to 40°F     |
| Amperage                             | 7.6             |
| Energy Consumption (kWh/day) @ASHRAE | 4.37            |
| Approx. Nominal Compres. BTU/HR (HP) | 1670(1/2HP)     |
| Refrigerant / Charge Amount (oz)     | R290 / (4.9oz.) |

## Options

- ☐ Organizer shelf (HS-5295)      Requires 2 sets of:  
☐ Price tag holder (HS-5296)    ☐ 4" Casters (HS-5288)  
☐ Epoxy Shelf (HS-5319)

## Warranty

3 Year - Parts and Labor on entire machine.  
5 Year - Parts on Compressor  
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #: \_\_\_\_\_  
Project: \_\_\_\_\_  
Qty: \_\_\_\_\_  
AIA#: \_\_\_\_\_

## Features

- ▶ Curved vertical corners with silver aluminum exterior provide enhanced product display
- ▶ Forced air evaporator for quick temperature pull down
- ▶ Energy saving hot gas loop on front edge of cabinet helps prevent condensation
- Listed under NSF/ANSI Standard 7 for the storage and/or display of packaged or bottled products.
- Large glass doors are energy efficient Low-E multi pane glass
- (5) white epoxy coated shelves per section with product stops are standard
- Automatic energy saving hot gas loop on front edge of refrigeration compartment helps prevent condensation particularly in hot humid environments
- LED illuminated exterior canopy
- Energy efficient vertical LED interior lights illuminate products on display
- Door is mounted on heavy duty hinges with self-closing mechanism
- Silver painted aluminum exterior with NSF approved white steel interior and stainless steel floor
- Environmentally friendly CFC-Free Polyurethane insulation with cyclopentane blowing agent.
- Stainless steel shelf clips adjustable in 1/2" increments on anodized aluminum supports
- Refrigerant flow is controlled with a capillary tube
- 8 Foot cord and plug
- 2 inch leveling legs standard

Capacity:  
20 oz. bottles: 630  
12 oz. bottles: 1440

Container Qty: 14

*Hoshizaki reserves the right to change specifications without notice.*




# RM-49-HC

Glass Door Merchandiser with Swing Door




RM-49-HC  
01/15/22  
Item # 13544


## FRONT VIEW

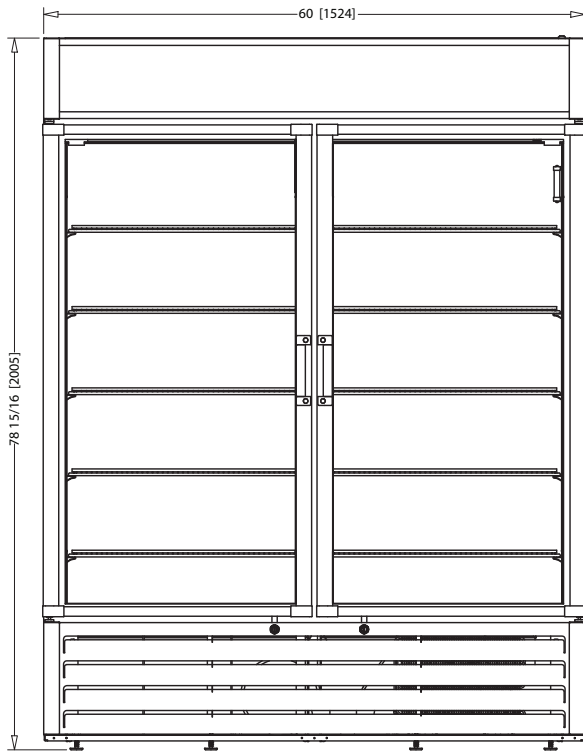


## SIDE VIEW

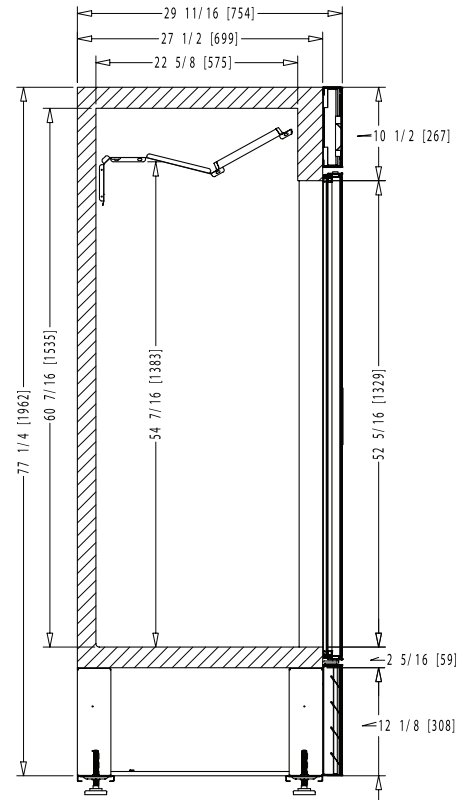

## PLAN VIEW

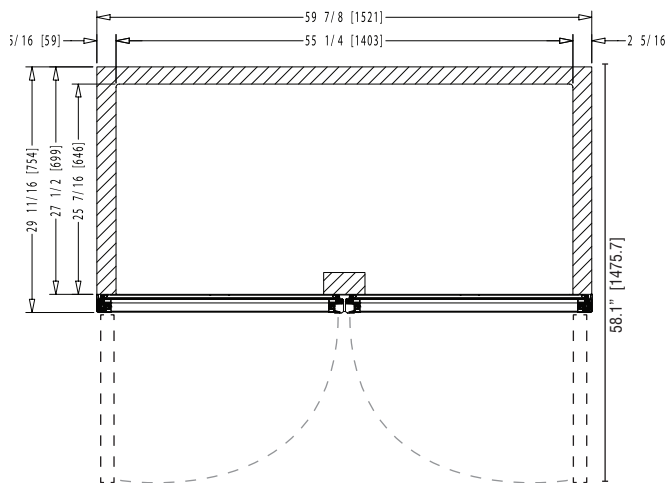

## HEADER DIMS

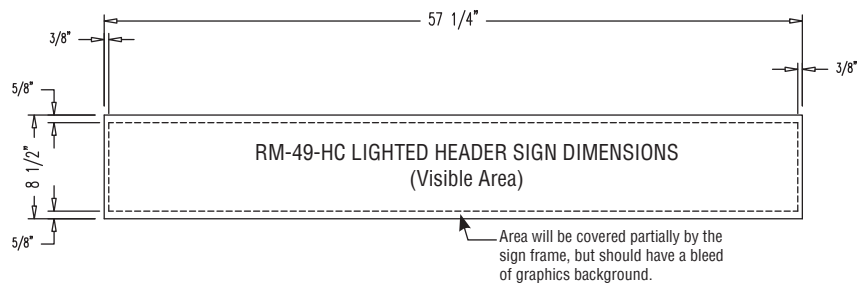

### Graphic Requirements:

- 360 dpi resolution. Scale 1=1
- Colors for CMYK process
- Image with 1/4" of excess by side
- Graphics must be saved in photoshop (with layers) (or your sign company file type requirements)
- Include a full color print out

### Material Requirements:

- Thickness: 1/16" (1.5mm)
- Good- Acrylic/Pexiglass, Better - high impact acrysteel, acrylite SG
- Best- Super impact Lexan, Lexan SG Polycarbonate

Note: Texts and important parts of the image should be within the visible area.  
The visible area is illustrated by dotted lines when it applies.