

Features

- Wide coverage spray produces an encompassing spray for everyday use
- 1.5 gpm (5.7 lpm) maximum flow rate handshower allows you to save water without sacrificing performance or coverage
- Variable-flow lever lets you adjust from 1.5 gpm (5.7 lpm) down to 0.5 gpm (1.9 lpm) water pause for greater conservation during your shower routine
- Sprayface resists hard water buildup and is easy to clean
- Magnetic docking connection allows for handshower height adjustment of 2" (51 mm) and spray angle tilt of 24-58°
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing
- Hose is a durable, flexible polymer blend with soft-touch finish for a hassle-free drape

Technology

- Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray

Installation

- Wall-mount
- For use in shower-only installations

Included Components

K-20998 Single-function handshower, 1.5 gpm
K-21049 60" shower hose
K-21051 Wall-mount handshower holder and supply elbow




Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
NOM Standards
NOM 008-CONAGUA

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

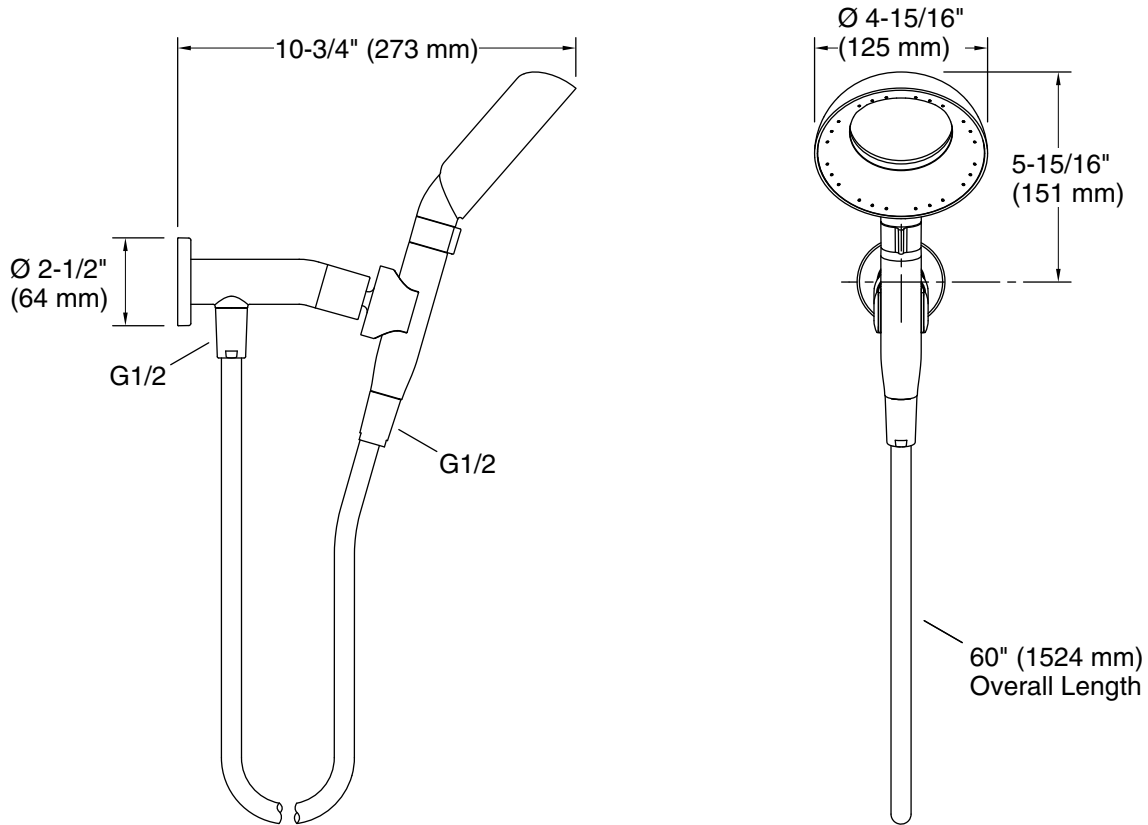

Technical Information

All product dimensions are nominal.

Spout:

Handshower rated max flow: 1.5 gal/min (5.7 l/min)