



# Harken®

One-piece compact elongated toilet with skirted trapway, 1.28 gpf  
**K-22695**

## Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl
- Standard height
- 1.28 gpf (4.8 lpf)
- Left-hand Polished Chrome trip lever
- 2-1/8" (54 mm) glazed trapway
- Fully skirted trapway simplifies cleaning
- Quiet-Close™ elongated lid and seat prevents slamming

## Installation

- Standard 12" (305 mm) rough-in
- Supply line sold separately
- Requires mounting plate for heated seat installation (sold separately)

## Recommended Products/Accessories

K-20110 Brevia™ Quiet-Close™ elongated toilet seat  
1362736 Mounting Plate Kit Exposed Wire

## Included Components

K-22203 Highline® Quiet-Close™ elongated toilet seat  
K-90094-L (Qty 2)



## Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)

## KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes


*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

|                                                                                     |   |       |
|-------------------------------------------------------------------------------------|---|-------|
|  | 0 | White |
|-------------------------------------------------------------------------------------|---|-------|

# KOHLER®

**Harken®**  
One-piece compact elongated toilet with skirted  
trapway, 1.28 gpf  
**K-22695**

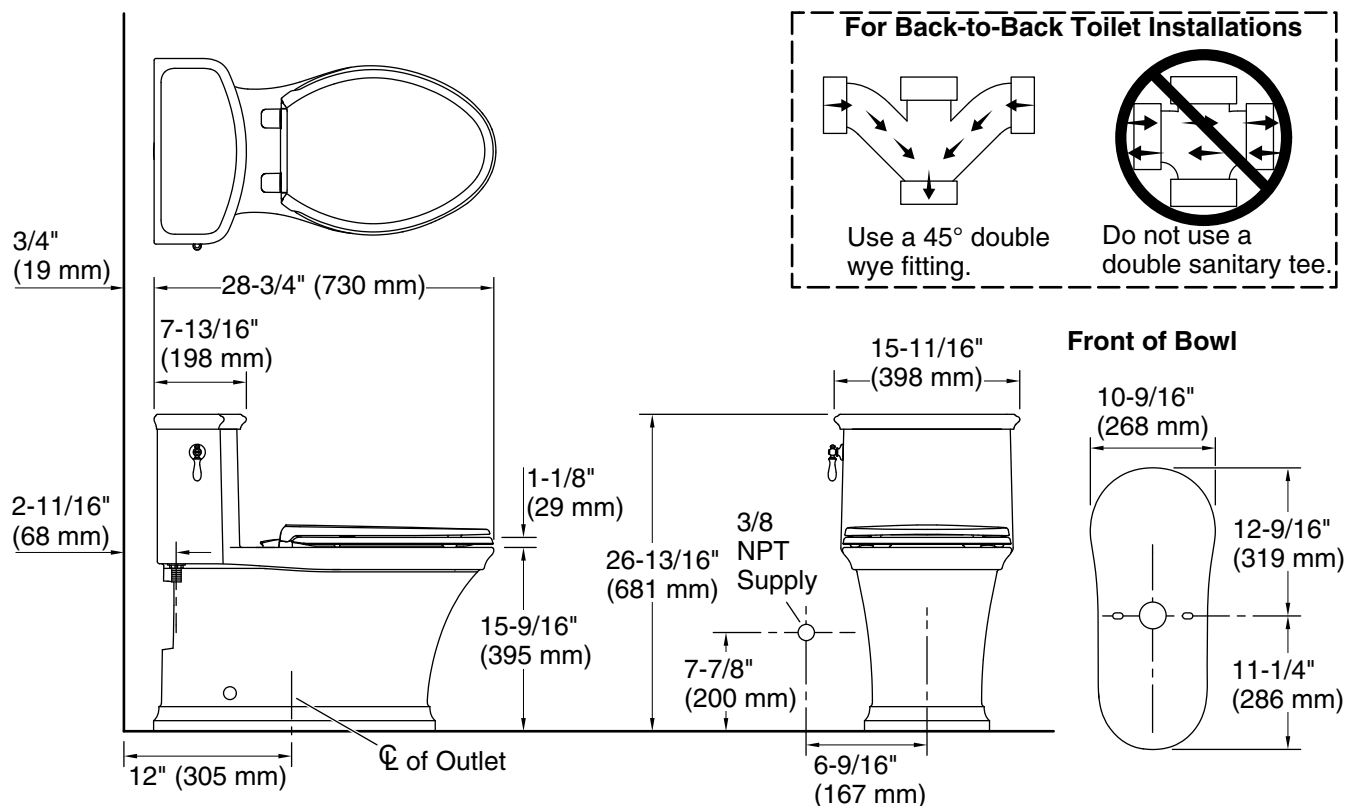

## Technical Information

All product dimensions are nominal.

|                       |                                          |
|-----------------------|------------------------------------------|
| Toilet type:          | Floor-mount                              |
| Waste Outlet:         | Floor                                    |
| Bowl shape:           | Elongated                                |
| Flush type:           | Class Five                               |
| Trap passageway:      | 2" (51 mm)                               |
| Water surface size:   | 7-13/16" x 5-1/8" (198 mm x 130 mm)      |
| Rim to water surface: | 5-15/16" (151 mm)                        |
| Rough-in:             | 12" (305 mm)                             |
| Seat-mounting holes:  | 5-1/2" (140 mm)                          |
| Template:             | Footprint, 1398502-7, required, included |

## Fixture Supply Requirements

|                       |                    |
|-----------------------|--------------------|
| Min static pressure:  | 20 psi (137.9 kPa) |
| Max static pressure:  | 80 psi (551.6 kPa) |
| Min flowing pressure: | 15 psi (103.4 kPa) |

Min flow rate: 1.28 gpf (2.0 lpm)

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

9-29-2025 21:51 - US/CA

## Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

THE BOLD LOOK  
OF **KOHLER®**