

### Features

- Integrated push-button diverter provides simple, intuitive control of two shower outlets
- Ability to run each outlet individually or at the same time
- Sleek, minimalist design
- Easy-to-use temperature dial control
- Suitable for shower applications with two outlets
- Duration/countdown timer feature
- Digital thermostatic valve technology guarantees accurate and safe temperature control.
- Adjustable high-temperature limit for added safety
- Compatible with the KOHLER Mode app and BLUETOOTH® wireless technology to provide remote on/off capability and setting adjustments

### Installation

- Wall-mount




### Codes/Standards

UL 1951  
CSA C22.2 No. 14  
CSA C22.2 No. 68  
cUL Listed  
UL Listed

### KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty

See website for detailed warranty information.

The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license. Other trademarks and trade names are those of their respective owners.

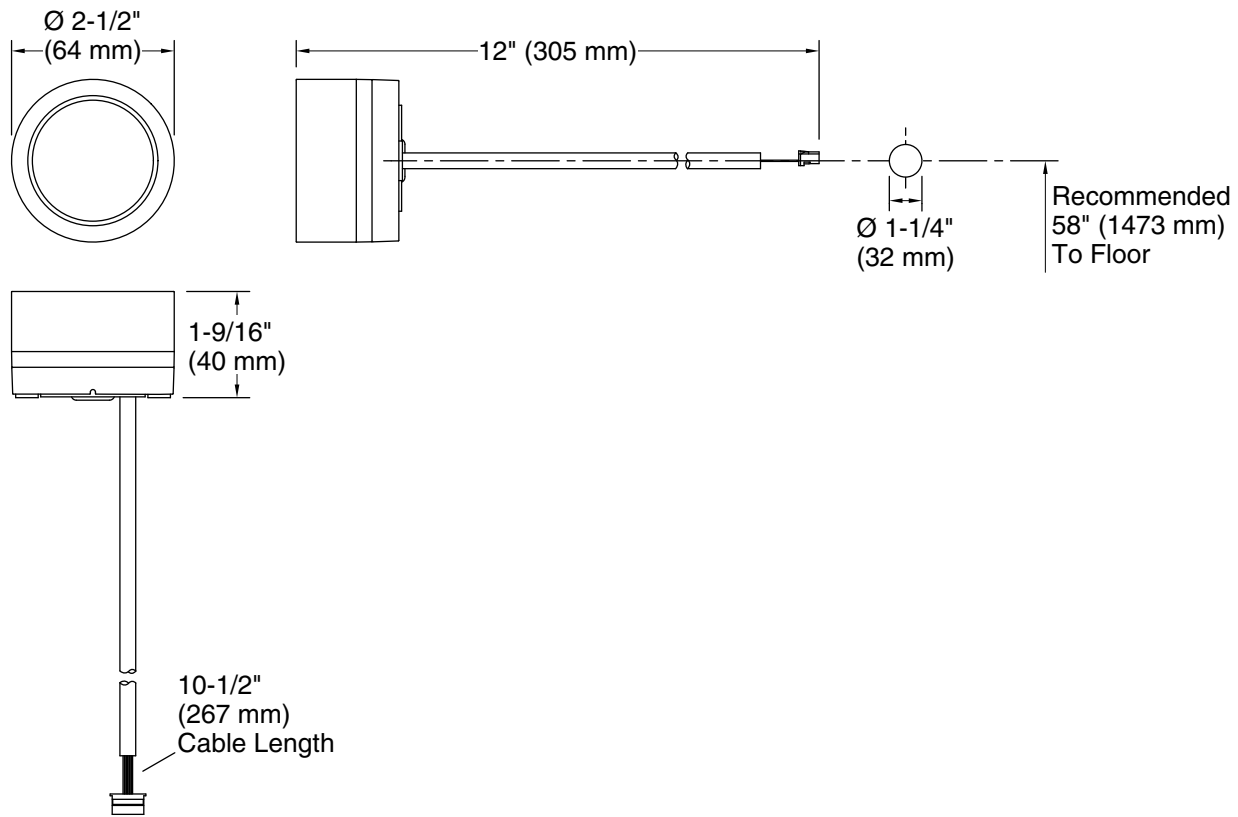

## Technical Information

All product dimensions are nominal.

### Spout:

Bluetooth® range: 32 ft (9.8 m)  
 Bluetooth® version: 4.1  
 Max. Ambient temp: 125°F (51.7°C)  
 Min. Operating temp: 120°F (48.9°C)  
 Max. Operating temp: 86°F (30°C)  
 Max. Relative humidity condensing: 100%

## Notes

Install this product according to the installation instructions.