

### Features

- Engineered for optimal performance with KOHLER toilets
- Fixture-mount design
- Chloramine resistance on all rubber components exposed to waterway
- Includes vacuum breaker and control stop

### Material

- Durable brass construction

### Technology

- Nonhold open piston technology for accurate activation

### Installation

- Intended for toilet installations with 1-1/2" (38 mm) top spud coupling connection



ADA

CSA B651

OBC

### Codes/Standards

ASSE 1037/ASME A112.1037/CSA B125.37  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*


| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



CP

Polished Chrome

\*10-3/4" (273 mm) minimum with a  
6" (152 mm) critical level above the fixture

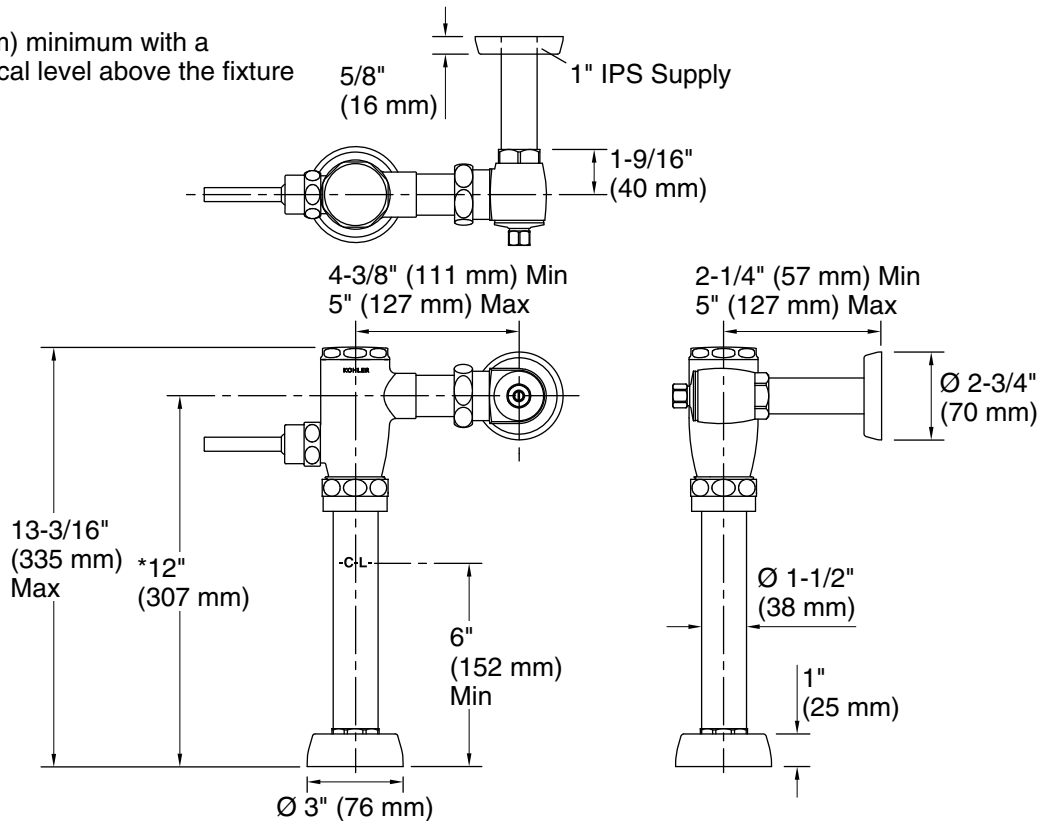

### Technical Information

All product dimensions are nominal.

#### Spout:

#### Pressure/fixture Supply Requirements

|                                   |                    |
|-----------------------------------|--------------------|
| Fixture pressure<br>max (static): | 80 psi (551.6 kPa) |
| Fixture pressure min<br>(static): | 35 psi (241.3 kPa) |
| Min flowing<br>pressure:          | 25 psi (172.4 kPa) |
| Min flow rate:                    | 25 gpm (94.6 lpm)  |

### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.