

### Features

- 0.5 gpf (1.9 lpf)
- 125-micron filter protects internal components
- High back pressure vacuum breaker
- Locking stop cap and nonhold open design provide protection against vandalism
- No external flush volume adjustment ensures water conservation
- Chloramine and chlorine resistance on all rubber components exposed to waterway
- Patented piston technology for superior flush volume accuracy

### Material

- Brass construction with durable Polished Chrome finish

### Technology

- Double seal handle design for long life without leaks
- Nonhold open piston technology for accurate activation

### Installation

- For urinal installations with 3/4" top spud coupling connection
- Can be installed for left- or right-handed users

### Recommended Products/Accessories

- 1421939 Flushometer Arm Extension Kit
- 1509698 Pressure Gauge Kit, 1/8"



### Codes/Standards

ASSE 1037/ASME A112.1037/CSA B125.37  
EPA WaterSense®  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC  
NOM Standards  
NOM 002-CONAGUA

### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

### Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome

\*10-3/4" (273 mm) minimum with a 6" (152 mm) critical level above the fixture

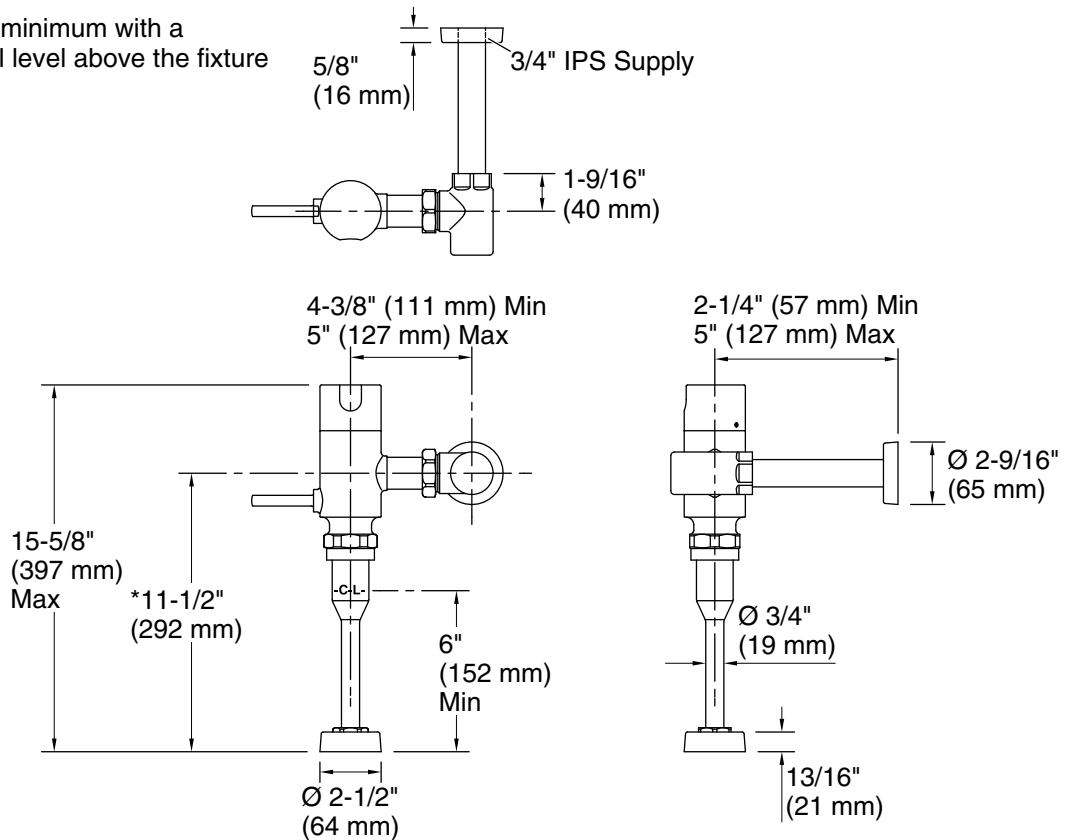

### Technical Information

All product dimensions are nominal.

#### Spout:

#### Pressure/fixture Supply Requirements

Fixture pressure max (static):	80 psi (551.6 kPa)
Fixture pressure min (static):	25 psi (172.4 kPa)
Min flowing pressure:	25 psi (172.4 kPa)
Min flow rate:	10 gpm (37.9 lpm)

### Notes

Install this product according to the installation instructions.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.