

### Features

- Single lever handle allows for both on/off activation and temperature setting
- Remote-valve handle allows for ease of access
- Diverter spout
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- High-temperature limit setting for added safety
- 11.0 gpm (41.6 lpm) maximum flow rate at 45 psi (3.1 bar)
- Coordinates with Pitch® bath and shower trim

### Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

### Installation

- Deck- or bath-mount



### Codes/Standards

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description                    |
|-------------------------------------------------------------------------------------|------|--------------------------------|
|  | CP   | Polished Chrome                |
|  | BN   | Vibrant® Brushed Nickel        |
|  | BL   | Matte Black                    |
|  | 2MB  | Vibrant® Brushed Moderne Brass |

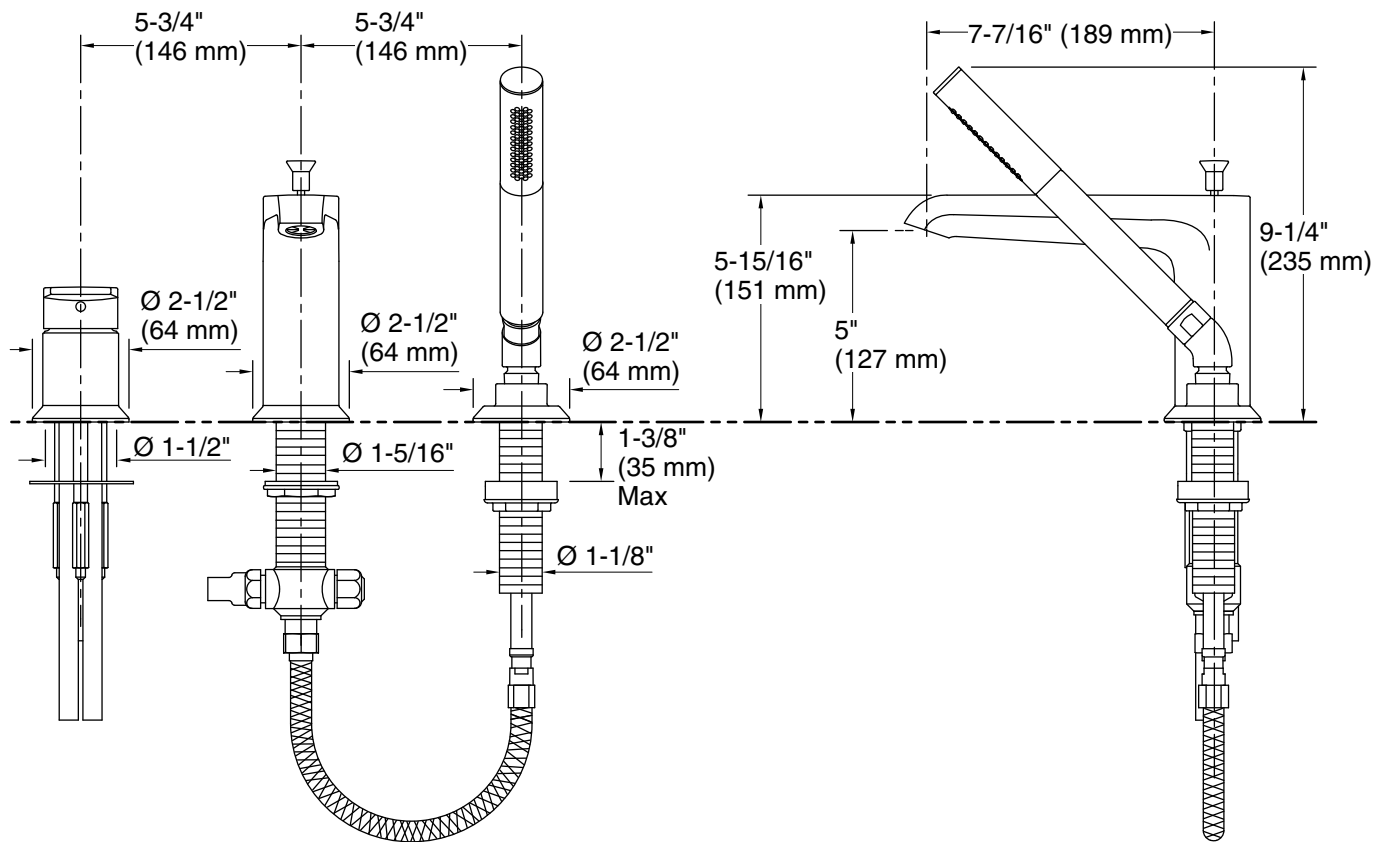

## Technical Information

All product dimensions are nominal.

Faucet flow rate: 11 gal/min (41.6 l/min)

### Spout:

Spout reach: 7-7/16" (189 mm)

Handshower rated max flow: 1.75 gal/min (6.6 l/min)

## Notes

Install this product according to the installation instructions.

**CAUTION:** Do not install the bath faucet in an area where it may inadvertently be used for support by the bather.