



4832MT



48" x 32" x 3" (exterior bottom of base)	
MULTIPLE, LOW-PROFILE THRESHOLD smooth floor	
End Drain	
<b>Acrylic CXL®</b>	<b>DoloMatte®</b>
65 lbs / 29 kg	73 lbs / 33 kg

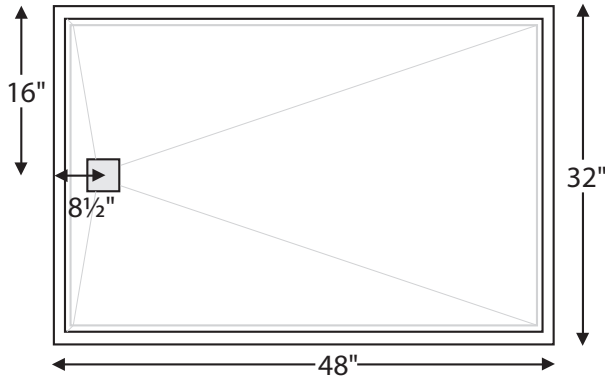

When ordering, please specify tile flange locations.



Model #	Material	Color / Finish	MSRP
SB4832MT	Acrylic CXL®	White (CWH) or Biscuit (CBS) / Gloss	<b>\$1,850</b>
SBDM4832MT	DoloMatte®	White (CWH) / Matte	<b>\$2,235</b>

Must specify color code on order. DoloMatte available in white only. Not for use in steam shower applications.

**Options** *Must be ordered at time of purchase*

**Quick Ship (QSPRI) \$475**

Reduces lead time. Please call for availability.

**Radiance® (RAD100) \$1,760** Shower floor heating system. Radiance heating grids are fully integrated within the acrylic shell structure of the shower floor. Requires a 110-volt, 15 amp GFCI and remote installation of control box & keypad.

**Pre-Levelled Foam Base (PLFSB) \$240**

**PVC Drain Kit Finishes** Chrome included with shower base  
Brushed Nickel upcharge (SBSQDBN) **\$135**

**Accessories**

**Drain Kit**

Solid Brass Drain Kit with Stainless Steel Trim (SBSQDSB) **\$215**

**Teak Shower Seat**

Premium

Natural Stainless (TK-SSEAT2416BNS) **\$3,280**

High-Polished Stainless (TK-SSEAT2416BHP) **\$3,750**

Standard

Natural Stainless (TK-SSEAT2215NS) **\$1,220**

High-Polished Stainless (TK-SSEAT2215HP) **\$1,700**

**Teak Bath Mat (TKMAT3018) \$880** Measures 30" x 17.5" x 1"  
Custom sizes also available. Contact MTI for details.

**Teak Shower Tray (TK4832MT)**

**Contact MTI for pricing**



Factory-installed tile flange is 1/16" thick.

Account for this thickness when planning final opening size.

**IMPORTANT ORDERING & INSTALLATION INFORMATION**

- Factory-installed tile flange on 1, 2 or 3 sides to facilitate installation. Must specify tile flange location(s) on order.
- 3.5" drain opening pre-drilled.
- Dimensions provided represent the length and width of the bottom of the base without tile flange. See Installation Instructions.
- Add proper wet-bedding compound to fully support bottom of shower base. Optional factory installed Pre-Levelled Foam Base negates the need to wet bed when installing on a flat, level subfloor. See installation instructions.
- All bases are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. DoloMatte bases meet ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.

• Options and accessories may be packaged inside the box. Always check packaging before discarding.  
• All product measurements are ±1/2".  
• Specifications and configurations are subject to change without notice.  
• Measurements herein supersede all others published prior to publication date below.

See the Installation & Operation Manual for more details.  
MTI's Customer Service: Monday-Friday 8am-6pm EST  
**800-783-8827** or [service@mtibaths.com](mailto:service@mtibaths.com)

CSA # MTSB-4832MT  
HURL # MTSB-DM4832MT