



**MTSB-6036BF**

|  |
|--|
| 59.5" x 36" x 1.75"<br>(exterior bottom of base) |
| <b>BARRIER-FREE THRESHOLD</b><br>textured floor  |
| Center Drain                                     |
| <b>Acrylic CXL®</b>                              |
| 115 lbs / 52 kg                                  |

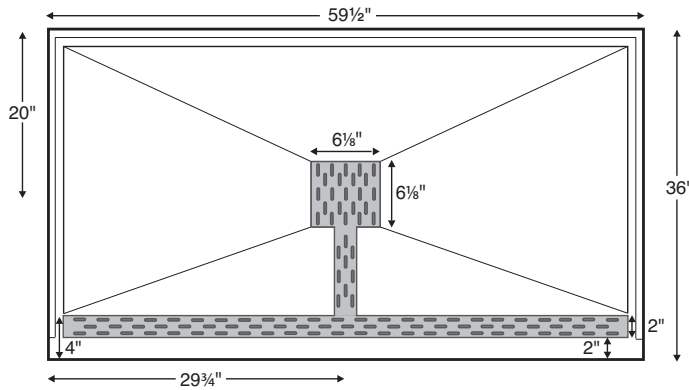

Designed to be recessed into floor, to create a flat transfer surface.

Not for use in steam shower applications.

| Model #  | Package Content  | Size                | Shape     | MSRP           |
|----------|--|---------------------|-----------|----------------|
| SB6036BF | Natural stainless steel drain and channel cover, PVC drain kit | 59.5" x 36" x 1.75" | Rectangle | <b>\$2,630</b> |

| Options <i>Must be ordered at time of purchase</i>   |
|--|
| <b>Color</b> Please specify color on order<br>White (CWH)<br>Biscuit (CBS)   |
| <b>Quick Ship (QSPRI) \$475</b><br>Reduces lead time. Please call for availability.  |
| <b>Radiance® (RAD100) \$1,760</b> Shower floor heating system. Radiance heating grids are fully integrated within the acrylic shell structure of the shower floor. Requires a 110-volt, 15 amp GFCI and remote installation of control box & keypad. |
| <b>Pre-Levelled Foam Base (PLFSB) \$240</b>  |
| <b>Drain &amp; Channel Cover</b> Natural stainless steel drain & channel installed on base as standard.  |

| Accessories   |
|---|
| <b>Drain Kit</b><br>Solid Brass Drain Kit with Stainless Steel Cover (SBDKSB) <b>\$215</b>  |
| <b>Teak Shower Seat</b><br>Premium<br>Natural Stainless (TK-SSEAT2416BNS) <b>\$3,280</b><br>High-Polished Stainless (TK-SSEAT2416BHP) <b>\$3,750</b><br>Premium ADA<br>Natural Stainless (TK-SSEAT2416BNSA) <b>\$3,925</b><br>High-Polished Stainless (TK-SSEAT2416BHPA) <b>\$4,495</b><br>Standard<br>Natural Stainless (TK-SSEAT2215NS) <b>\$1,220</b><br>High-Polished Stainless (TK-SSEAT2215HP) <b>\$1,700</b> |

**IMPORTANT ORDERING & INSTALLATION INFORMATION**

- Zero-barrier single front threshold designed for ease of transfer between bathroom and shower area.
- 3-sided integral tile flange to facilitate installation.
- 3.5" drain opening pre-drilled.
- Compliant with ASTM C 1028-07 coefficient of friction test.
- Add proper wet-bedding compound to fully support bottom of shower base. Optional factory installed Pre-Levelled Foam Base negates the need to wet bed when installing on a flat, level subfloor. See installation instructions.

• Options and accessories may be packaged inside the box. Always check packaging before discarding.  
• All product measurements are ±1/2".  
• Specifications and configurations are subject to change without notice.  
• Measurements herein supersede all others published prior to publication date below.

See the Installation & Operation Manual for more details.  
MTI's Customer Service: Monday-Friday 8am-6pm EST  
**800-783-8827** or [service@mtibaths.com](mailto:service@mtibaths.com)

CSA # MTSB-6036BF

©2025 by MTI Baths, Inc. Modification Rights Reserved

