



Electronic Urinal

Trim Only for hardwire operated electronic concealed valve for WASHDOWN urinals with 3/4" BACK inlet-10" Front Access Cover with Braided Polymer Outlet Hose

Model No: 1600T9001TR

COMPLIES WITH:

- IAPMO listed to ASSE 1037/ ASME A112.1037/ CSA B125.37
- Indicates compliance to ICC/ANSI A117.1
- INSTALLATION NOTE: Models must be installed on fixtures providing sufficient air gap protection against backflow.
- (Contact Delta Representative for State and/or Local Approvals)



SPECIFICATION:

- Infrared electronic urinal flushing system
- Power function light, field selectable sensor range
- Electronic manual override
- TRIM ONLY(Roughin must be purchased separately)
- Hardwire infrared electronic solenoid activated Teck® WASHDOWN urinal system
- For 3/4" BACK INLET URINAL
- Stainless steel RECESSED MOUNTING cover with integral sensor utilizing H²Optics® technology
- Optional battery backup available

OPERATION:


- 8 second blocking time
- Activation Delay: 0 seconds on urinal applications
- Adjustable flush volume of 0.4 to 1.0 gallons (1.5 to 3.8 litre) Factory set 0.5 gallons (1.9 litres)
- Selectable sensing distance: 12" to 28" in 4" increments. Factory set to 20".
- Adjustable 24 hour courtesy flush factory set to off.
- For Rough In (RI model), see 1600T9001RI

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 13, 2021.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030

Model No: 1600T9001TR

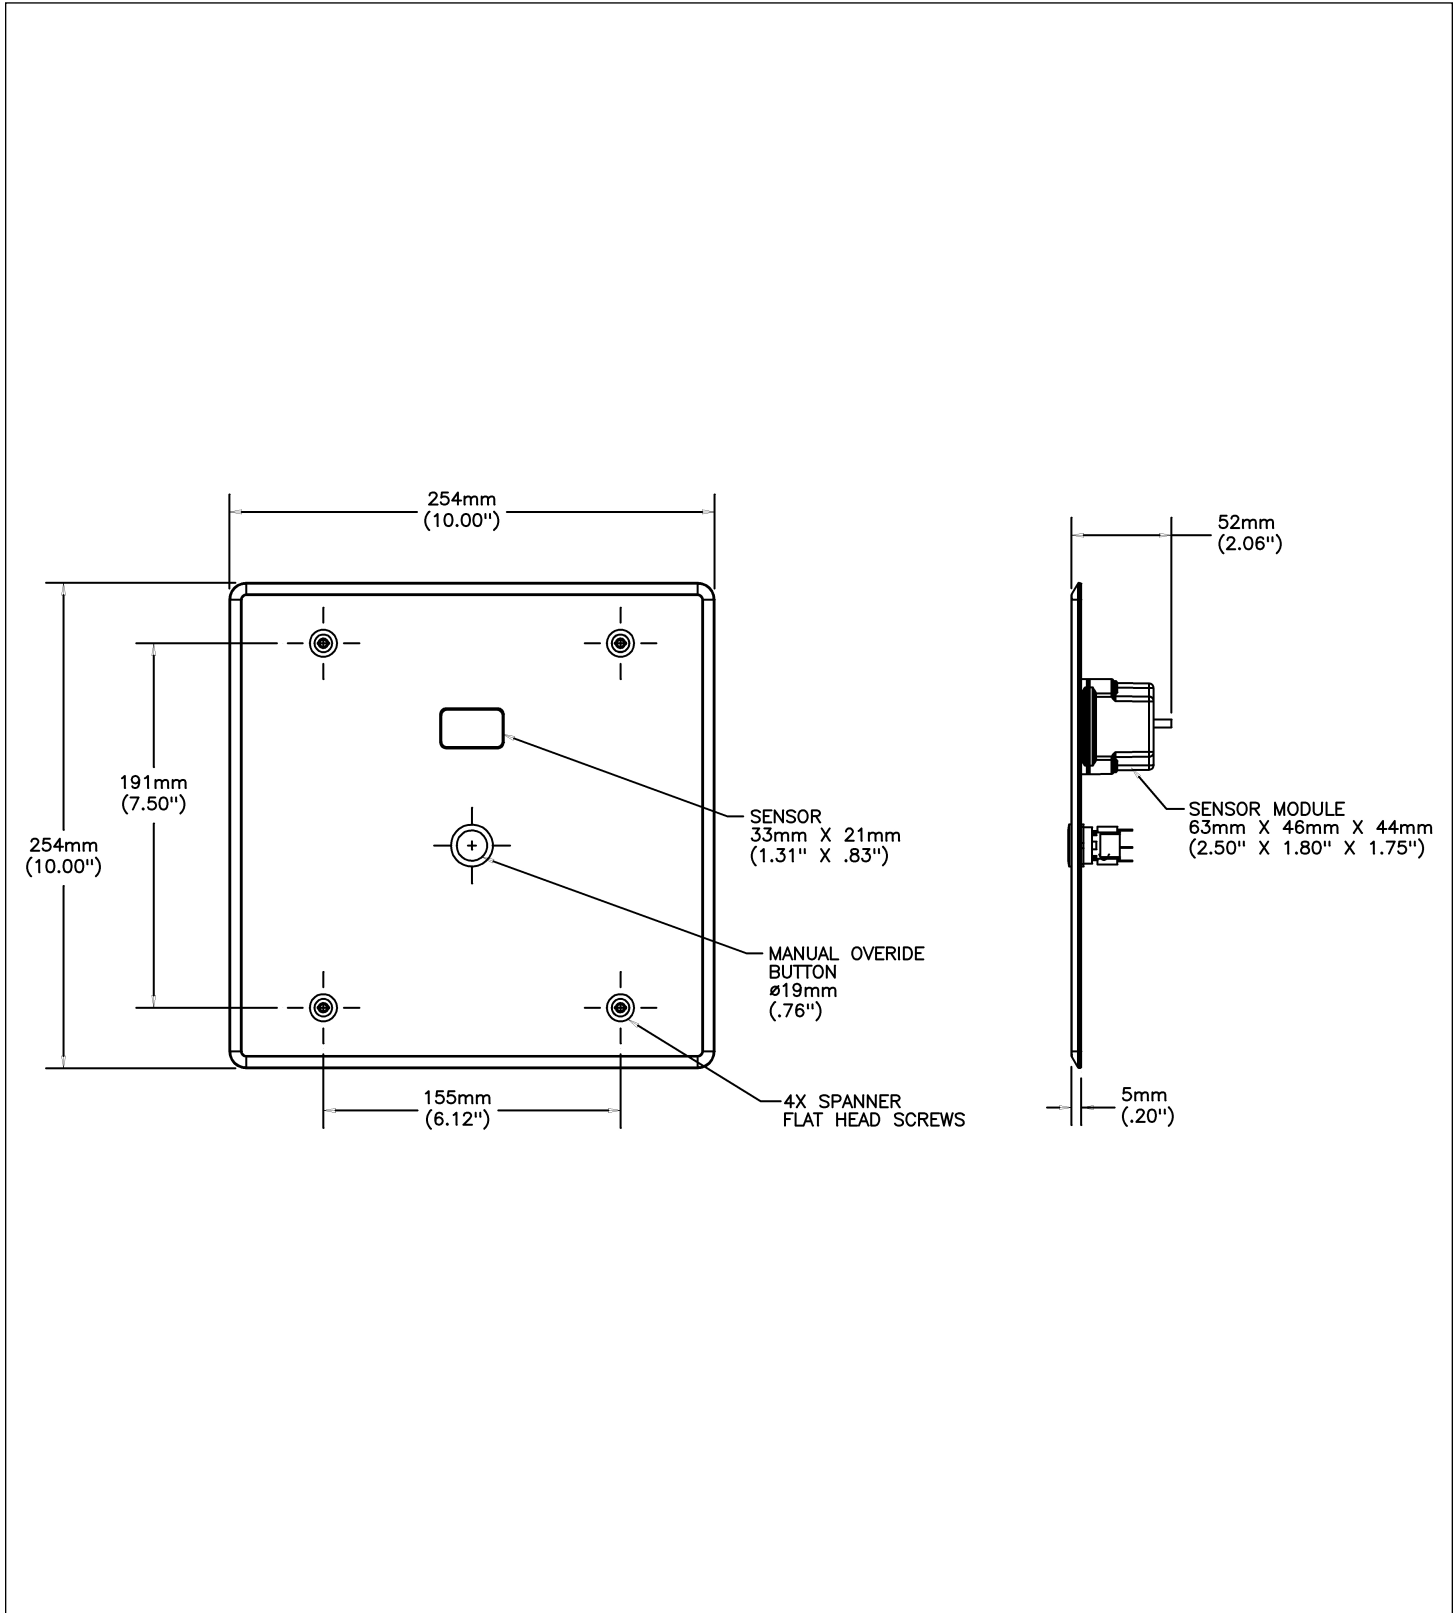

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 13, 2021.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
 Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030